SJC Series Pleated Jumbo Cartridges

LEGIONELLA § **CONTROL SYSTEMS 5**



- Available in 0.35 to 100 micron ratings
- Large diameter, single cartridge construction makes installations and change outs simple and quick with minimal handling
- High media surface area for maximizing service life and optimizing filter performance and value
- · Rugged construction designed for residential, commercial and industrial use
- · Compatible with wide range of potable water and aqueous industrial applications
- Available in three sizes for flow rates up to 150 GPM
- 20 micron and above cartridges may be washed and reused

Applications

RO Prefilters Food & Beverage **Process Water Bottled Water Swimming Pools** Spas

Plating Solutions Water & Wastewater

Specifications & Operating Parameters

Pore Sizes

1A, 0.35, 1, 5, 20, 50 and 100 microns

Nominal Lengths

40 series 9 5/8" (24.5 cm) 90 series 19 1/2" (49.5 cm) 170 series 30 1/4" (76.8 cm)

Outside Diameter

7 3/4" (19.68 cm)

Materials of Construction

Filter Media: Polypropylene / Polyester Blend

Inner Core:

End caps: Polyurethane

Operating Temperature Range:

40°F (4.4°C) - 140°F (60°C)

Recommended Change-out Differential Pressure

20-25 psid (1.4 -1.7 bar)


Maximum Flow Rates Per Cartridge – GPM (LPM)

Series

001103				
Mic	ron	40	90	170
1/	4	20 (75.7)	40 (151.4)	80 (302.8)
0.3	35	25 (94.6)	50 (189.3)	100 (378.5)
1		30 (113.6)	60 (227.2)	120 (454.2)
5		50 (189.3)	100 (378.5)	150 (567.8)
20)	50 (189.3)	100 (378.5)	150 (567.8)
50)	50 (189.3)	100 (378.5)	150 (567.8)
10	0	50 (189.3)	100 (378.5)	150 (567.8)



Filter Removal Efficiency

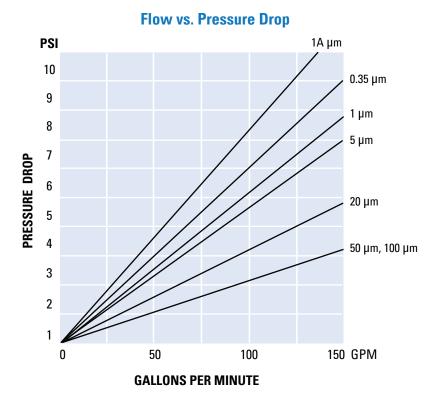

Ordering Guide (Example: SJC-170-5)

SJC -	- 170 -	- 5
MODEL	SERIES	MICRONS
SJC	40 90 170	1A 0.35 1 5 20 50 100

Filter Housings

Shelco manufactures a full line of filter housings. From our rugged single cartridge housings to our heavy duty multi-cartridge housings and bag filter housings, Shelco is the perfect choice for your filtration solutions.